



General Features

- Designed floating charging service life: 8 years (25°C)
- Sealed and maintenance free operation
- Safety valve installation for explosion proof
- Low self-discharge characteristic
- Wide operating temperature range from 0°C~40°C
- Lead Aluminum calcium Tin alloy high energy, prevent corrosion
- Maximum Discharge Current : 50 Amperes for 5 seconds

Application

- DC power supply
- UPS/EPS power supply
- Electrical devices & instruments
- Security and fire alarm systems
- Telecom stations and power stations
- Medical equipments
- Emergency lighting systems



Constant-Voltage Charge

Rated Capacity	
20 hour rate (0.25A)	5.30AH
10 hour rate (0.50A)	4.95AH
5 hour rate (0.85A)	4.25AH
27 minute rate(5.0A)	2.30AH
7 minute rate (15.0A)	1.78AH
Capacity affected by Temperature	
40°C(104°F)	103%
25°C(77°F)	100%
0°C(32°F)	86%

Cycle Application	
1. Limit initial current less than 1.25A.	
2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77°F).	
3. Hold at 14.1V to 14.4V until current drop to under 0.03A for at least 3 hours.	
4. Temperature compensation coefficient of charging voltage is -30mV/°C.	
Standby Service	
1. Hold battery across constant voltage source of 13.6 to 13.8 volts with current limit 1.25A continuously .When held at this voltage , the battery will seek its own current level and maintain itself in a fully charge status.	
2. Temperature compensation coefficient of charging voltage is -18mV/°C.	

Battery Discharge Table

End Voltage (V)	Minute (M)					Hour (H)							
	5	10	15	30	45	1	1.5	2	3	5	8	10	20
Constant Current Discharge Data Sheet (Amperes at 25°C)													
10.20	19.21	12.82	10.21	5.24	3.94	2.964	2.413	1.851	1.383	0.870	0.583	0.500	0.265
10.50	18.42	12.58	9.99	5.09	3.85	2.954	2.382	1.799	1.352	0.860	0.577	0.495	0.263
10.80	17.43	12.28	9.71	4.90	3.68	2.922	2.319	1.706	1.300	0.843	0.572	0.490	0.260
Constant Power Discharge Data Sheet (Watt at 25°C)													
10.20	210.1	151.1	122.3	69.09	50.37	38.31	29.39	22.11	15.78	10.40	7.32	5.93	3.193
10.50	200.7	146.1	118.7	67.66	49.20	37.71	28.95	21.80	15.42	10.29	7.27	5.83	3.151
10.80	190.3	140.7	114.8	65.70	47.95	37.09	28.53	21.49	15.15	10.16	7.19	5.74	3.099


The Crown of Power Solution









Physical Specifications

Nominal Voltage	Nominal Capacity (20HR)	Dimension				Weight $\pm 3\%$	Internal Resistance (In full charge status)	Standard Terminals
		L	W	H	TH			
12V	5.0AH	91 ± 2 mm	70 ± 2 mm	102 ± 2 mm	107 ± 2 mm	Approx 1.54kg (3.40lbs)	$\approx 24 \text{ m}\Omega$	F01/F02 (standard)

Dimensions (mm)

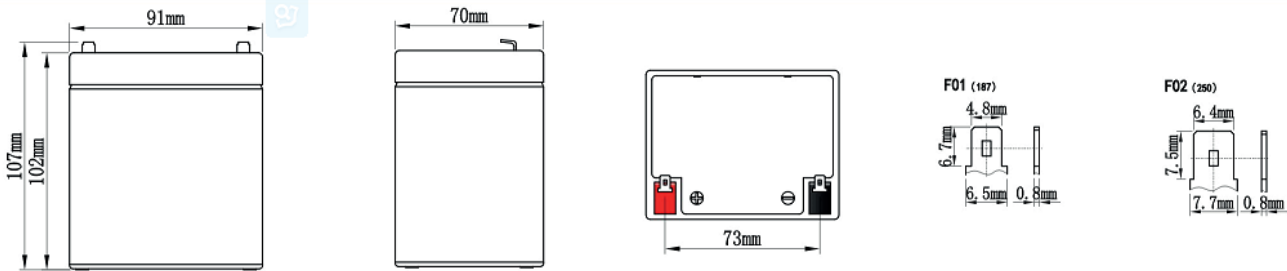

Performance Characteristics

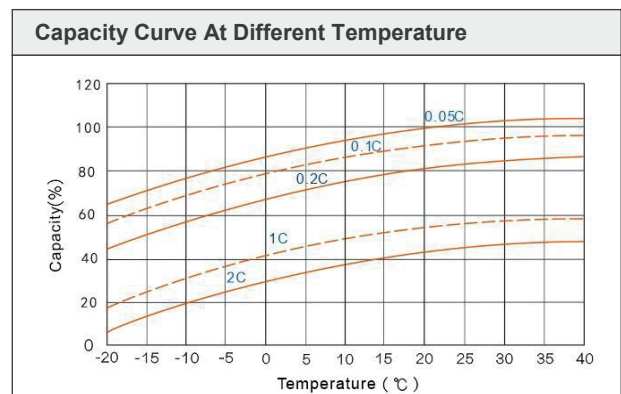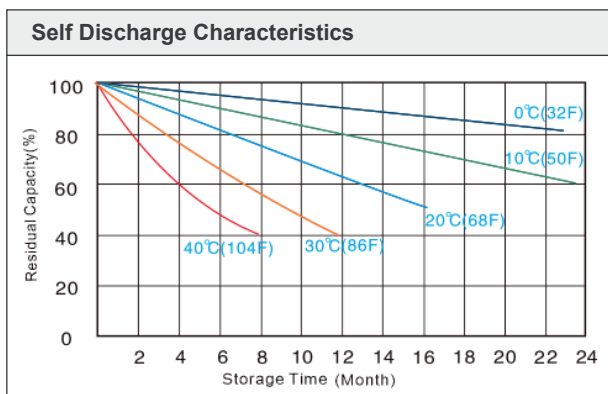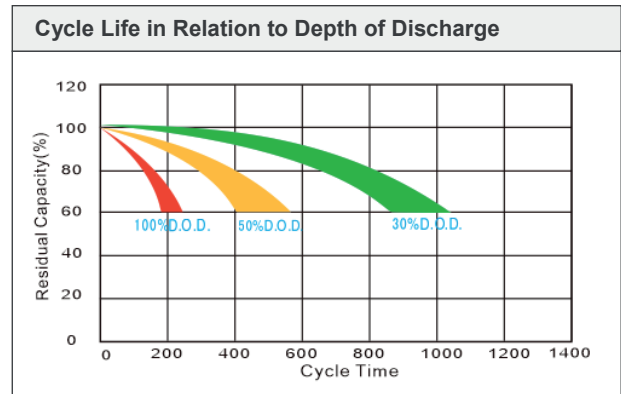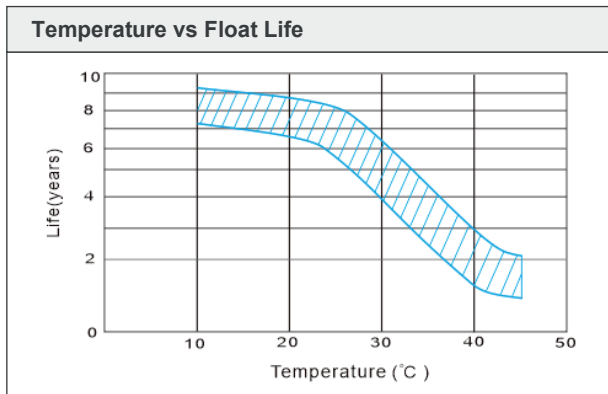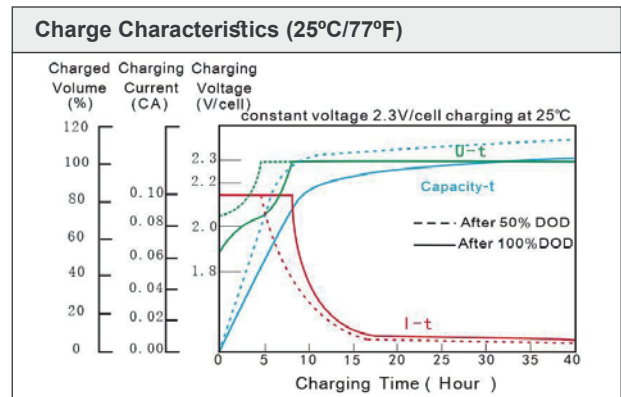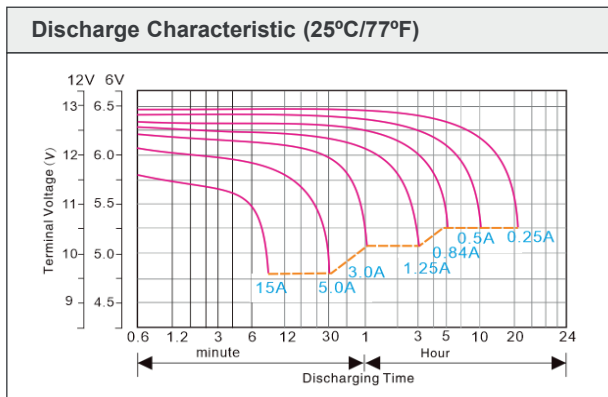

The Crown of Power Solution