

PS-482000-LSS



PS-482000-LSS a powerful 48V LiFePO₄ battery product, has been especially designed to provide power backup for remote or outdoor telecom sites. Its modular design enables parallel installation meeting also the needs for larger power back up.

Benefits

- Increased energy in given space
- Easy installation and upscaling
- High operational reliability
- Optimized supervision strategy through remote control/diagnostic
- Excellent long life time
- Built-in intelligent BMS to protect the battery pack at any time and prolong its service life


General Features

Model	PS-482000-LSS	
Nominal Voltage	48V	
Typical Capacity	200Ah (25 °C,0.2C)	
Typical Energy	9600 Wh	
Volumetric Energy Density	172.4 Wh/dm ³	
Gravimetric Energy Density	117.8 Wh/kg	
Dimensions	Width	440mm
	Height	222mm(5U)
	Depth	570mm
Reference Weight	81.5K g	
Electrical Characteristics		
Voltage Window	40.5~54.0V	
Charge Voltage Range	52.5~54.0V	
Max. Permanent Discharge Current	100A	
Max. Permanent Charge Current	100A	
Faradic Charge Efficiency	99% (+20°C)	
Energy Charge Efficiency	94% (+20°C)	
Communication Interface (optional feature)	Modbus/SNMP/TACP	
Additional Features (optional feature)	LCD Display	
Operation Environment		
Charge Temperature	0°C to +55°C	
Discharge Temperature	-20°C to +60°C	
Storage Temperature	-20°C to +60°C	
Protection Class	IP20	

Discharge Data



Constant Current Discharge Data(25 °C)								
Voltage/V	Current/A		0.1C	0.2C	0.3C	0.33C	0.4C	0.5C
	Time/h							
45.0			9.475	4.858	3.254	2.925	2.420	1.925
43.5			9.927	4.948	3.309	2.988	2.453	1.960
42.0			10.003	4.996	3.344	3.046	2.494	1.990
40.5			10.101	5.044	3.359	3.048	2.510	2.001

Performance Curve

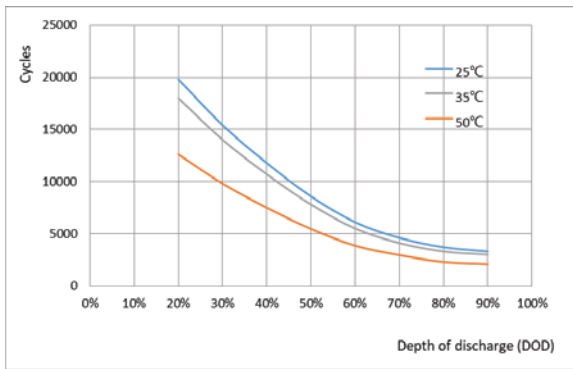


DOD vs Cycles


Drawing

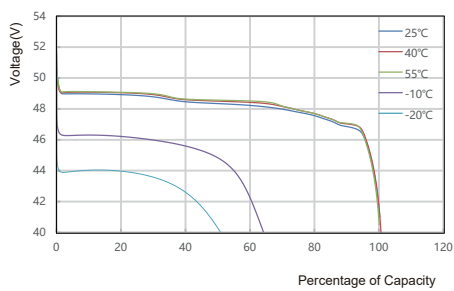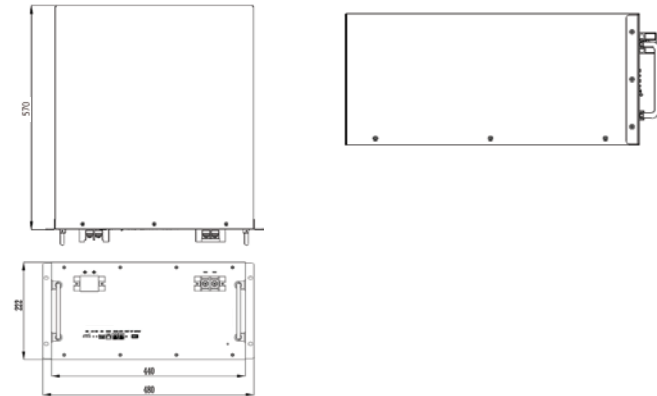


Discharge Curve at Different Temperature

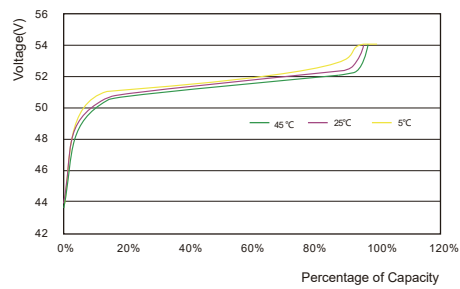

Charge Curve at Different Temperature

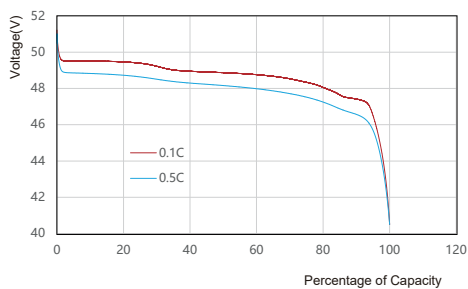

Discharge Curve at Different Rate (25 °C)

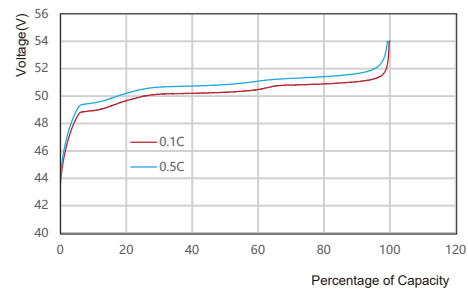

Charge Curve at Different Rate (25 °C)

THE CROWN OF POWER SOLUTION