

PS-5122000-NLWT

Features:



This series is a complete solution for the lithium iron phosphate battery system for the home energy storage field. There are three types of wall-mounted, vertical structures and rack. The system is safe and reliable. It can be used in home storage, industrial and commercial energy storage and other fields.

Product Features



Safe, reliable
and long life



Dynamic identification, automatic
Paralleling, no need for DIP switches



Support Bluetooth, mobile
APP switching PCS Protocol



Flexible expansion, the number of
parallel machines supports up to 15



CAN/RS485/
LAN interface



Visualization, LCD
screen display




Supports mixed parallel
of old and new batteries




Efficient operation
and maintenance

Compatible With Inverter Brands

MACQUARIE	SOROTEC	GROWATT	DEYE	VITVON	SERMATEC	LUXPOWER	GSSTES
SMA	GOODWE	SREN	HuiNeng	iYPower	OUKITEL	ROBOROCK	Sunsunk
Voltronic	Pylontech	MustPower	SAKO	Senergy	Felicity	KSTAR	Solis

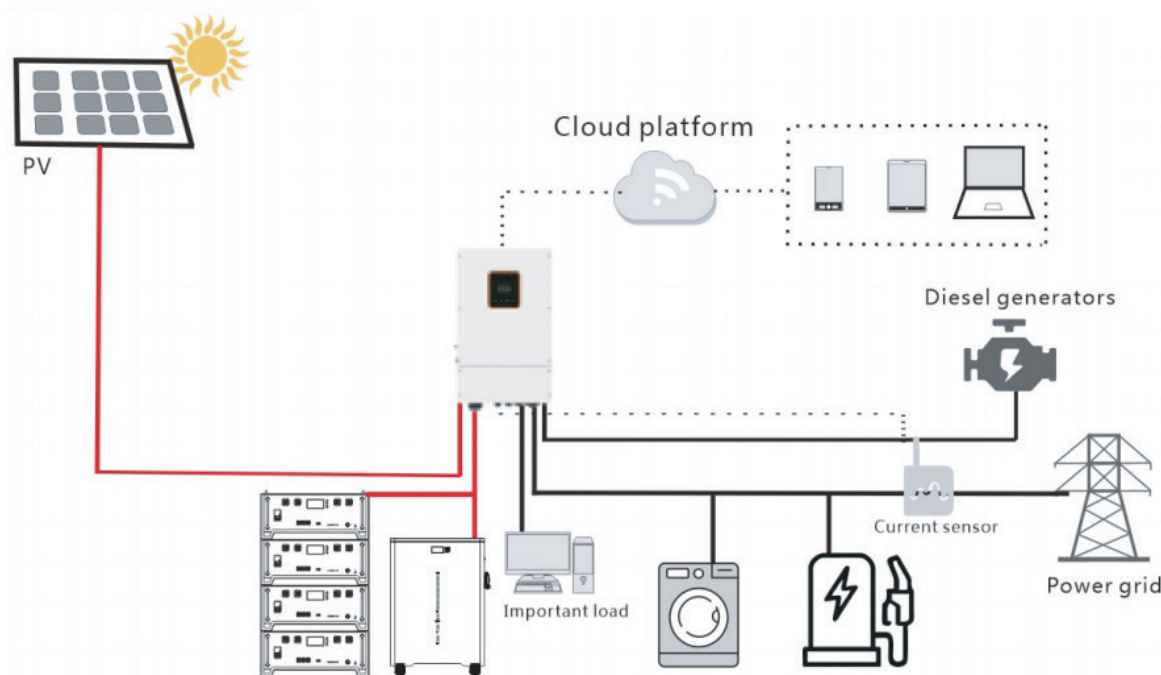

System Specifications

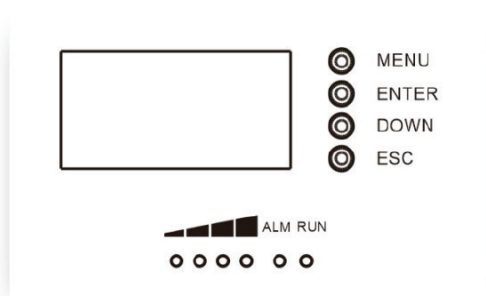

Panel silkscreen preview



Battery communication interace preview

Model	PS-5122000-NLWT
Voltage(V)	43.2~58.4V
Cell	3.2V 200Ah
Number of parallel machines	15PCS
Nominal voltage(V)	51.2
Nominal Capacity(Ah)	200
Nominal Energy(kWh)	10.24
Maximum power output(kWh)	7.68
Maximum discharge current(A)	150
Maximum charging current(A)	100
Recommended discharge voltage(Min)(V)	48(40)
Recommended charging voltage (Max) (V))	56(58.4)
Cycles(25 °C,0.5C,90%DOD)	≥ 6000
Design life(25 °C,0.2C)	10 years
Charging temperature(°C)	0~55
Discharge temperature(°C)	-20~55
Operating humidity	<95%R.H
Communication mode	CAN/RS485
Dry contact	Customized by demand
Optional modules	Bluetooth
Product size(W*D*H,mm)	550*442*222
Packing size(W*D*H,mm)	637*497*315
Protection class	IP21
System w eight(kg)	Approx 96.2